


Version 1.0

09.02.23

# CASE STUDY

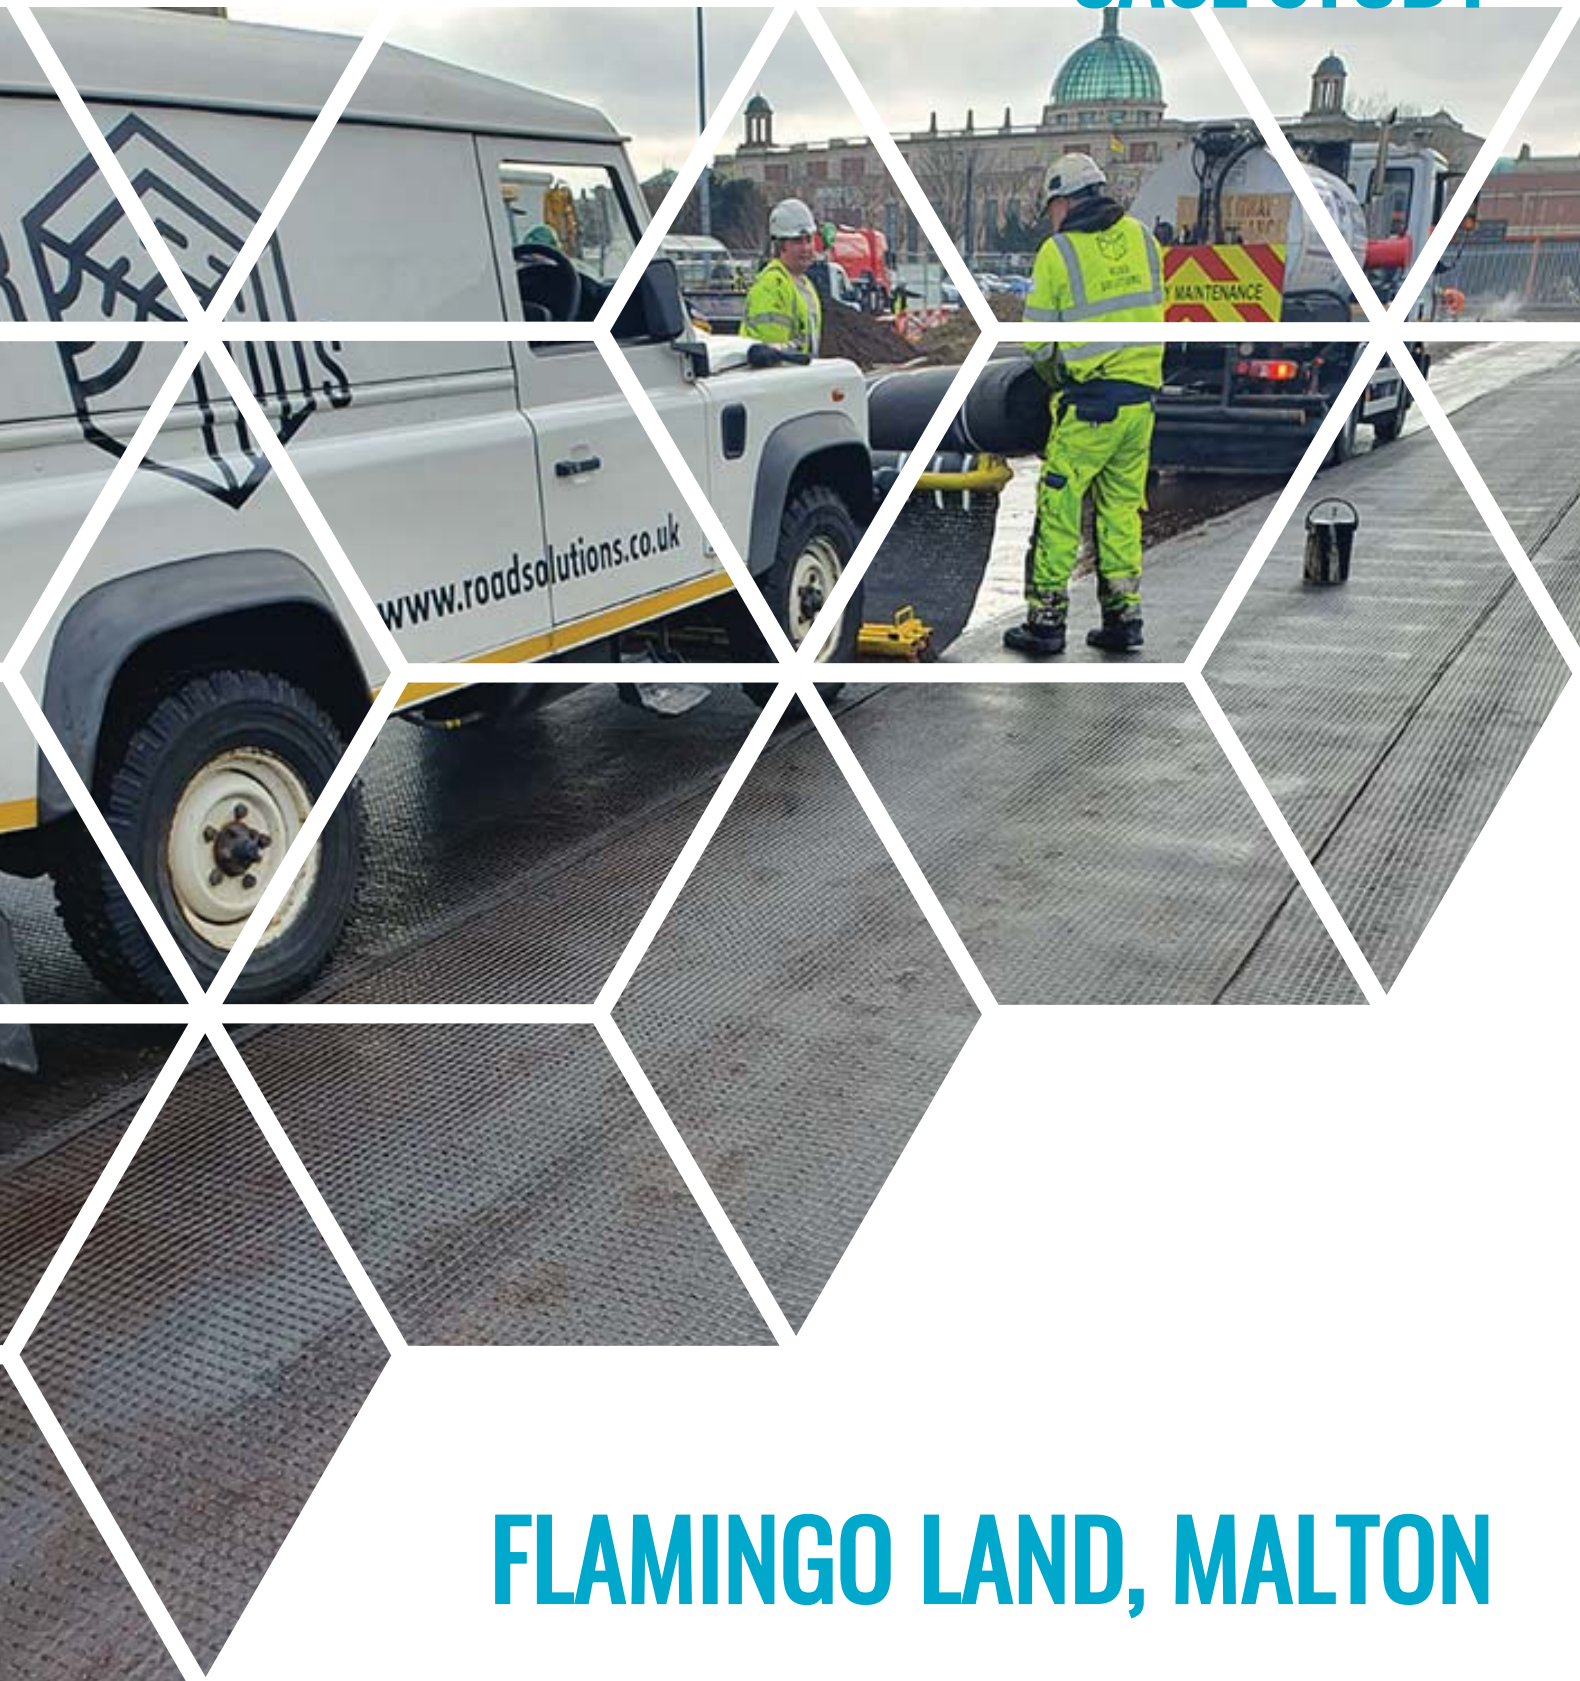


## FLAMINGO LAND, MALTON



**ROAD SOLUTIONS LTD**  
Unit 14, Fall Bank Industrial Estate,  
Dodworth, Barnsley, S75 3LS, UK

Tel: +44 (0) 7788806676  
enquiries@roadsolutions.co.uk  
www.roadsolutions.co.uk



|   |                    |   |
|---|--------------------|---|
|  | Road Solutions Ltd | Page 1 of 1                                       |
|   | <b>CASE STUDY</b>  | Issue: 01<br>Date: 06/04/2022<br>Ref: CS/FLAMINGO |
| Unit 14, Fall Bank Industrial Estate, Dodworth, Barnsley, S75 3LS                 |                    | Approved: MJJ                                     |

Client: Flamingo Land Resort  
 Main Contractor: EC Surfacing Ltd  
 Road Location: Flamingo Land, Kirby Misperton, Malton, YO17 6UX  
 Road Type: Access carriageway  
 Description of Work: Road reconstruction incorporating asphalt reinforcement system  
 Geosynthetic Installed: GLASSCOMP G 100  
 Area: 1950m<sup>2</sup>  
 Bitumen Bond Coat: Colbond 50 applied at 1.0 L/m<sup>2</sup>  
 Installation Records: As Built Manual, Quality Manual & Installation Assessment Forms  
 Crack Map Survey: N/A

### THE ROAD PROBLEM

Reflective cracking, rutting and fatigue to access road.

### THE ROAD PROBLEM

A design incorporating GLASSCOMP G 100 pavement reinforcement system to prevent the reoccurrence of reflective cracking, rutting and fatigue. GLASSCOMP G 100 was installed by the Road Solutions Ltd team of certified and experienced operatives, working over day shifts. Output average 1950m<sup>2</sup> per shift.

### THE ROAD CONSTRUCTION

Install GLASSCOMP G 100 onto existing asphalt surface, overlay with 50mm SMA surface course.



### THE CONTRACT SUMMARY

NCR'S: None  
 COMPLAINTS: None  
 COMPLETION CERTIFICATE: Not provided  
 CUSTOMER FEEDBACK: Not provided  
 CUSTOMER SATISFACTION QUESTIONNAIRE SCORE: Not provided  
**SUMMARY: All work completed and signed off as satisfactory by the client.**